

## DATASHEET 5.0

# SO-CFP-ER4

CFP, 100GBASE-ER4, OTU4, 1310nm, SM, DDM, 40km

## OVERVIEW

The SO-CFP-ER4 is a CFP (C Form-factor Pluggable) transceiver for 100 Gbps Ethernet (100GBASE-ER4) and OTN (OTU4) applications. It is intended for use in inter- and intra-connect applications within and between data centers between switches, routers, storage equipment etc. The optical performance is in accordance with the 100GBASE-ER standard, i.e. for optical distances up to 40km over a SingleMode (SM) fiber.

SO-CFP-ER4 uses four channels/lanes @ 25.78 Gbps and 27.95 Gbps to transport an Ethernet and OTN signal, respectively.

<sup>1)</sup> Aggregated line rate (100GbE / OTU4)

<sup>2)</sup> Per lane line rate (100GbE / OTU4)

<sup>3)</sup> Total power (all lanes)

<sup>4)</sup> Lane 1


<sup>5)</sup> Lane 2

<sup>6)</sup> Lane 3

<sup>7)</sup> Lane 4

<sup>8)</sup> Per lane @ 25.78 Gbps (100GbE)

<sup>9)</sup> Per lane @ 27.95 Gbps (OTU4)

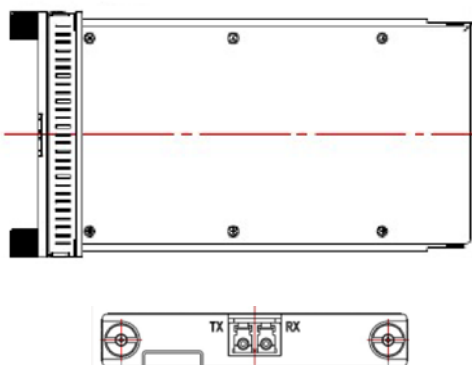

## TECHNICAL DATA

|                          |  |
|--------------------------|--|
| Technology               | Grey CFP   |
| Transmission media       | SM (2x LC)   |
| Typical reach            | 40 km  |
| Nominal wavelengths      | Lane 1: 1295.56 nm<br>Lane 2: 1300.05 nm<br>Lane 3: 1304.58 nm<br>Lane 4: 1309.14 nm   |
| Interface standards      | 100GBASE-ER4<br>OTU4 4L1-9C1F  |
| Bit rate range           | 103.12 / 111.81 Gbps <sup>1)</sup><br>25.78 / 27.95 Gbps <sup>2)</sup>   |
| Protocol support         | Eth: 100GbE<br>ONT: OTU4   |
| Power budget             | 0 - 18.0 dB (100GbE)<br>0 - 18.0 dB (OTU4)   |
| Temperature range        | 0°C to +70°C   |
| Power consumption        | < 12W  |
| <b>Transmitter data:</b> |  |
| Output power, tot:       | Max: +8.9 dBm <sup>3)</sup>  |
| Output power, per lane   | Min: -2.9 dBm <sup>8)</sup><br>Max: +2.9 dBm <sup>8)</sup>   |
| Tx wavelength (nm)       | 1294.53 – 1296.59 <sup>4)</sup><br>1299.02 – 1301.09 <sup>5)</sup><br>1303.54 – 1305.63 <sup>6)</sup><br>1308.09 – 1310.19 <sup>7)</sup> |
| <b>Receiver data:</b>    |  |
| Minimum input power      | -20.9 dBm <sup>8)</sup><br>-20.7 dBm <sup>8)</sup>   |
| Overload (Maz power)     | +4.5 dBm <sup>8)9)</sup>   |
| Wavelength range         | 1264.5 – 1277.5 <sup>4)</sup><br>1284.5 – 1297.5 <sup>5)</sup><br>1304.5 – 1317.5 <sup>6)</sup><br>1324.5 – 1337.5 <sup>7)</sup>         |
| DDM                      | Yes  |
| MSA compliance           | CFP2 MSA   |

| Regulatory compliance |   |
|-----------------------|---|
| EMC CE                | EN 55022:2010<br>EN 55024:2010  |
| UL/Safety             | UL 60950-1  |
| FCC                   | 47 CFR PART 15 OCT, 2013  |
| RoHS                  | RoHS 6  |
| TUV                   | EN 60950-1:2006+A11+A1+A12+A2<br>EN 60825-1:2014<br>EN 60825-2:2004+A1+A2 |
| Storage temp.         | -40°C to 85°C   |

## ORDERING INFORMATION

| Part Number           | Description                                     |
|-----------------------|---|
| SO-CFP-40GBase-LR4-20 | CFP, 40Gbps Ethernet LR4, SM, DDM, 10.7dB, 20km |

## DEFINITIONS

|                                     |  |
|-------------------------------------|--|
| <b>Technology</b>                   | Grey; Transceiver type for non-WDM applications. Electrical or optical. CWDM; Transceiver type for CWDM applications using G.694.2 channel grid. DWDM; Transceiver type for DWDM applications using G.694.1 channel grid. BiDi; Transceiver pair using two different wavelength channels operating on a single-fiber.<br>DAC: Direct Attach Cable (DAC). Electrical or optical cable with attached connectors. |
| <b>Transmission Media</b>           | Type of fiber, e.g. Multimode (MM) or Singlemode (SM). Number of and connector type within brackets (e.g. 2x LC, 1x MPO).  |
| <b>Typical reach</b>                | Nominal distance performance based on dispersion and power budget properties, i.e. w/o dispersion compensation and optical amplification.  |
| <b>Bit rate range:</b>              | Supported bit rate range in Gigabit or Megabit per second (Gbps or Mbps).  |
| <b>Protocols:</b>                   | Protocols within supported bit rate range.   |
| <b>Nominal wavelength</b>           | Typical wavelength from transmitter.   |
| <b>Interface standards</b>          | Referenced interface standards e.g. IEEE 802.3 standard for 10GbE services.  |
| <b>Power budget</b>                 | Min and max power budget between Transmitter and Receiver. Excluding any dispersion penalty.   |
| <b>Dispersion tolerance/penalty</b> | Maximum amount of tolerated dispersion and required reduction of power budget to maintain BER better than $1E^{-12}$ . Defined at a specific bit rate.   |
| <b>Temperature range</b>            | Max operating case temperature range.<br>Standard temperature range: Typically 0°C to +70°C (32°F to +158°F)<br>Extended temperature range (E-temp): Typically -20°C to +75°C (-4°F to +167°F)<br>Industrial temperature range (I-temp): -40°C to +85°C (-40°F to +185°F)  |
| <b>Power consumption</b>            | Worst case power consumption.  |
| <b>Transmitter Output power</b>     | Average output power. Provided in min and max values.  |
| <b>Receiver minimum input power</b> | Minimum average input power at specified BER, normally $1E^{-12}$ .  |
| <b>Receiver max input power</b>     | Maximum average input power giving a BER, normally $1E^{-12}$ .  |
| <b>DDM</b>                          | Digital Diagnostic Monitoring functionality as defined in SFF-8472 MSA.  |