

**DATASHEET 6.0****QSFP28 100G-SR4****QSFP28, 100G Eth SR4, MM 4x 850nm, 100m, 1.9dB, MPO, I-temp****TQ2015-M85I-SO**

The TQ2015-M85C-SO is a QSFP28 form-factor transceiver for 100Gbps Ethernet (100GBASE-SR4) applications. It is intended for use in inter- and intra-connect applications within data centers between switches, routers, storage equipment etc. The optical performance is in accordance with the 100GBASE-SR IEEE 802.3bm standard, i.e. for optical distances up to 100m over a MultiMode (MM) OM4-grade ribbon fiber.

Forward Error Correction (FEC) is required in the host equipment to ensure reliable system operation at the specified distance. The FEC type shall be as defined in IEEE802.3bj, i.e. Reed Solomon RS(528,514). The below optical parameters will provide a bit error ratio (BER) of  $5 \times 10^{-5}$ . FEC will render in the required BER of better than  $1 \times 10^{-12}$ .

TQ2015-M85C-SO uses 4x channels @ 25.78 Gbps to transport a 100G Ethernet signal. The transceiver has a single 12 lane optical fiber MPO/MTP-connector interface.

TQ2015-M85I-SO is operating in the Industrial temperature range (I-temp): -40°C to 85°C (-40°F to 185°F).

## TECHNICAL DATA

Parameter	Value
Technology	Grey QSFP28
Transmission media	MM (1x MPO)
Typical reach	70m @ OM3, 100m @ OM4
Nominal wavelength	4x 850nm
Interface standards	100GBASE-SR4
Bit rate support	103.12Gbps <sup>1)</sup> 25.78 Gbps <sup>2)</sup>
Protocol support	100GbE
Power budget	0 – 4.3dB
Power consumption	< 2.5W
Operating temperature	0°C to +70°C
Storage temperature	-40°C to +85°C

- 1) Aggregated line rate 100GbE
- 2) Per lane
- 3) Average power
- 4) Specified at BER  $5 \times 10^{-5}$ , PRBS 2<sup>31</sup>-1

### Safety/regulatory compliance:

TUV/UL/FDA (contact Smartoptics for latest certification information)

RoHS compliance

MPO (Multi-fiber Push On) is an optical connector for ribbon cables with four to twenty-four fibers.

MTP is a specific brand of an MPO connector.


## ORDERING INFORMATION

Ordering number	Description
TQ2015-M85I-SO	QSFP28, 100G Eth SR4, MM 4x 850nm, 100m, 1.9dB, MPO, I-temp

## GENERAL DEFINITIONS

Parameter	Description
Technology	Grey; Transceiver type for non-WDM applications. Electrical or optical. CWDM; Transceiver type for CWDM applications using G.694.2 channel grid. DWDM; Transceiver type for DWDM applications using G.694.1 channel grid. BiDi; Transceiver pair using two different wavelength channels operating on a single-fiber. DAC: Direct Attach Cable. Electrical cable with attached connectors. AOC: Active Optical Cable. Optical cable with attached connectors.

Parameter	Value
<b>Transmitter data:</b>	
Output power, per lane	Min: -8.4dBm <sup>3)</sup> Max: +2.4Bm <sup>3)</sup>
Transmit wavelength	840 – 860nm
<b>Receiver data:</b>	
Minimum input power	-10.3dBm <sup>2) 3) 4)</sup>
Overload (max power)	+2.4dBm <sup>2) 3) 4)</sup>
Wavelength range	840 – 860nm
LOS Assert	Min -30dBm
LOS De-assert	Max -11dBm
LOS Hysteresis	Min 0.5dB
DDM	Yes
MSA compliance	QSFP28 MSA

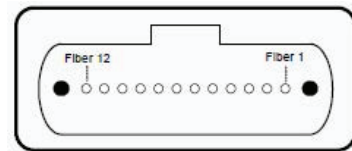

## GENERAL DEFINITIONS

Parameter	Description
Transmission Media	Type of fiber, e.g. Multimode (MM) or Singlemode (SM). Number of and connector type within brackets (e.g. 2x LC, 1x MPO).
Typical reach	Nominal distance performance based on typical fiber dispersion, fiber loss and power budget properties, i.e. w/o dispersion compensation and optical amplification. Actual distance is dependent on actual optical path loss and dispersion properties.
Bit rate range	Supported bit rate range in Gigabit or Megabit per second (Gbps or Mbps).
Protocols	Protocols within supported bit rate range.
Nominal wavelength	Typical wavelength(s) from transmitter.
Interface standards	Referenced interface standards or MSA's, e.g. IEEE 802.3 standard for 10GbE services or 100G 4WDM-10 etc.
Power budget	Min and max power budget between Transmitter and Receiver w/o optical path penalties.
Dispersion tolerance/penalty	Maximum amount of tolerated dispersion and required reduction of power budget to maintain stipulated Bit Error Rate (BER) and at a given bit rate.
Temperature range	Max operating case temperature range. Standard temperature range (C-temp): 0°C to +70°C (32°F to +158°F) Extended temperature range (E-temp): typically -20°C to +75°C (-4°F to +167°F) Industrial temperature range (I-temp): -40°C to +85°C (-40°F to +185°F)
Power consumption	Worst case power consumption. Will vary over temperature.
Transmitter Output power	Average output power. Provided in min and max values.
Receiver minimum input power	Minimum average input power at specified BER, normally $1E^{-12}$ . Note that some protocols require FEC to achieve sufficient BER.
Receiver max input power	Maximum average input power giving a BER, normally $1E^{-12}$ .
DDM	Digital Diagnostic Monitoring functionality as defined in e.g. SFF-8472 MSA.

Smartoptics makes no warranties or representations, expressed or implied, of any kind relative to the information or any portion thereof contained in this document or its adaptation or use, and assumes no responsibility or liability of any kind, including, but not limited to, indirect, special, consequential or incidental damages, for any errors or inaccuracies contained in the information or arising from the adaptation or use of the information or any portion thereof. The information in this document is subject to change without notice.